


TABLE		
Case No.	L	OAL
SM0964	0.70"	0.90"
SM1264	1.00"	1.20"
SM1464	1.20"	1.40"
SM1664	1.40"	1.60"
SM1864	1.60"	1.80"
SM2064	1.80"	2.00"
SM2664	2.40"	2.60"
SM3064	2.80"	3.00"
SM3264	3.00"	3.20"
SM3464	3.20"	3.40"

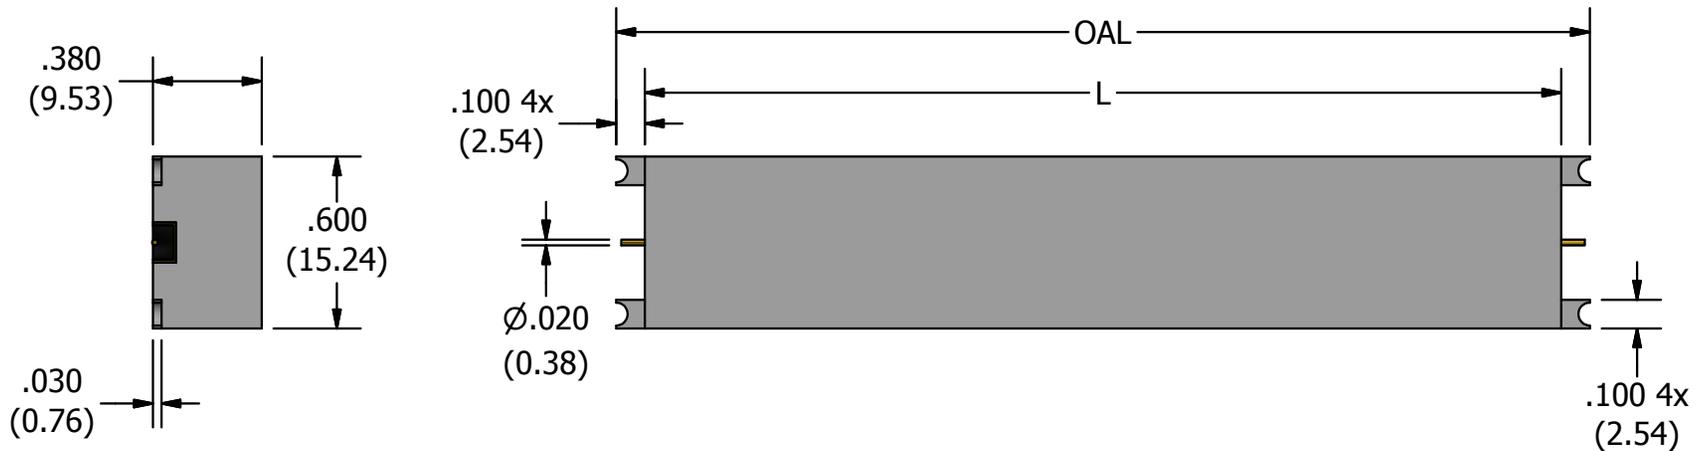

Notes:

- Material is Brass
- Finish is fused tin plate over copper plate
- Dimensions: inches (mm)
- No terminal Marking as filter is Bi-directional
- Do Not Scale

Re-flow Soldering Instructions:

- Pre-heating at 150°C for 60 to 120 seconds
- Re-flow at 200°C ± 5°C for 20 to 30 seconds
- Cooling to <150°C within 10 seconds of re-flow
- Absolute maximum duration for this process not exceed 150 seconds

CAGE CODE	DRAWING #	LTR	REVISION	BY	DATE	Unless otherwise specified dimensions are in inches. Tolerances on	This drawing or specification is the property of TTE LLC. Copies shall not be reproduced or copied or used as the basis for the manufacture or sale of apparatus without permission.	TTE	
07766	OL SM XX64	3	Added Additional Case Styles	JE	7/25/14				
Description		Case SM0964 - SM3464				XX ± .050		11652 West Olympic Blvd. Los Angeles, Ca 90064-1400	
DRAWN BY	JE	Approved By	ENG	QA	MFG	XXX ± .050			Phone Number: (310) 478-8224 Website: www.tte.com
						XXXX ± .050			
						Angles ±			
						Fractions ±			